



XML in the Development of Component Systems

XML Schema (Part 2)

DTD Example: Recipes

Document element

```
<!ELEMENT rezepte-sammlung (titel, rezept+)>
```

```
<xs:element name="rezepte-sammlung">
```

```
<xs:complexType>
```

```
<xs:sequence>
```

```
<xs:element ref="titel" />
```

```
<xs:element ref="rezept" maxOccurs="unbounded" />
```

```
</xs:sequence>
```

```
</xs:complexType>
```

```
</xs:element>
```

Recipes: Title

```
<!ELEMENT titel (#PCDATA)>
```

```
<xs:element name="titel" type="xs:string" />
```

Recipes: Individual Recipe

```
<!ELEMENT rezept  
  (titel, zutaten?, zubereitung, idee*)>  
  
<xs:element name="rezept">  
  <xs:complexType>  
    <xs:sequence>  
      <xs:element ref="titel" />  
      <xs:element ref="zutaten" minOccurs="0" />  
      <xs:element ref="zubereitung" />  
    </xs:sequence>  
  </xs:complexType>  
</xs:element>
```

Recipes: Ingredients

```
<!ELEMENT zutaten (zutat)+>
```

```
<!ELEMENT zutat (#PCDATA)>
```

```
<!ATTLIST zutat
```

```
  id ID #IMPLIED
```

```
  menge CDATA #IMPLIED>
```

Recipes: Ingredients (2)

```
<xs:element name="zutaten">
  <xs:complexType>
    <xs:sequence maxOccurs="unbounded">
      <xs:element name="zutat">
        <xs:complexType>
          <xs:simpleContent>
            <xs:extension base="xs:string">
              <xs:attribute name="id" type="xs:ID" />
              <xs:attribute name="menge" type="xs:string" />
            </xs:extension>
          </xs:simpleContent>
        </xs:complexType>
      </xs:element>
    </xs:sequence>
  </xs:complexType>
</xs:element>
```

Recipes: Preparation

<!ELEMENT zubereitung (#PCDATA | zutat)*>

<!ATTLIST zubereitung dauer CDATA #IMPLIED>

<!ATTLIST zutat

ref IDREF #IMPLIED>

Recipes: Preparation (2)

```
<xs:element name="zubereitung">
  <xs:complexType mixed="true">
    <xs:choice minOccurs="0" maxOccurs="unbounded">
      <xs:element name="zutat">
        <xs:complexType>
          <xs:simpleContent>
            <xs:extension base="xs:string">
              <xs:attribute name="ref" type="xs:IDREF" use="required" />
            </xs:extension>
          </xs:simpleContent>
        </xs:complexType>
      </xs:element>
    </xs:choice>
    <xs:attribute name="dauer" type="xs:string" />
  </xs:complexType>
</xs:element>
```


Element Groups

- ✚ Allow re-use of element definitions
- ✚ Can be used in a similar way as parameter entities in DTDs
- ✚ Must specify sequence, choice, or all

```
<xs:group name="person">  
  <xs:sequence>  
    <xs:element name="titel" type="xs:string" minOccurs="0" />  
    <xs:element name="vorname" type="xs:string" />  
    <xs:element name="name" type="xs:string" />  
  </xs:sequence>  
</xs:group>
```

Element Groups: Usage

```
<xs:complexType name="...">  
  <xs:sequence>  
    <xs:group ref="person" />  
    <xs:element name="alter" type="xs:short" />  
  </xs:sequence>  
</xs:complexType>
```

Attribute Groups

✚ Similar to element groups, grouping attributes

```
<xs:attributeGroup name="common.atts">  
  <xs:attribute name="id" type="xs:ID" />  
  <xs:attribute name="class" type="xs:string" />  
</xs:attributeGroup>
```

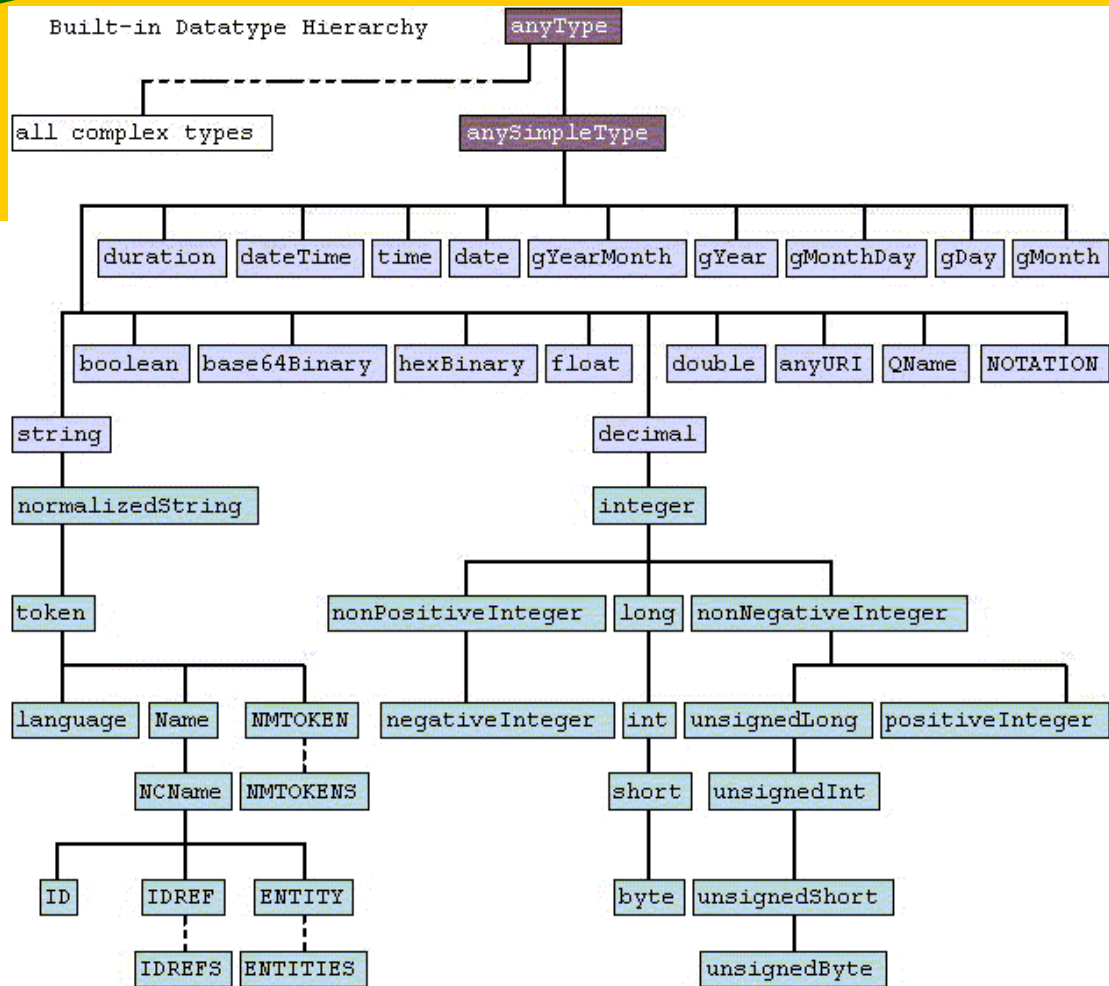
```
<xs:element name="p">  
  <xs:complexType>  
    ... <!-- Content model for p omitted -->  
    <xs:attribute ref="align" />  
    <xs:attributeGroup ref="common.atts" />  
  </xs:complexType>  
</xs:element>
```





Data Types

✚ Type Hierarchy of simple and complex data types

✚ Simple types:

- string: unconstrained Unicode character data (#PCDATA, CDATA)
- language: language code, e.g. de-AT
- NMTOKEN, ID, IDREF, IDREFS, ENTITY, ENTITIES: like DTDs
- float, double: "scientific" notation (mantissa, exponent)
 - represents closest IEEE-754 number
- decimal: arbitrary number of digits, including arbitrarily-precise fraction
- integer, long, int, short, ...: derived from decimal, with range constraints
- boolean: true/false, 0/1
- ...



- | | | | |
|---|--------------------------|--|-------------------------------------|
|  | ur types | | derived by restriction |
|  | built-in primitive types | | derived by list |
|  | built-in derived types | | derived by extension or restriction |
|  | complex types | | |

More Simple Types

- ✚ anyURI: an arbitrary URL
- ✚ QName: prefix:localname (with the prefix being declared)
- ✚ duration: a time duration, in format PnYnMnDTnHnMnS
 - e.g. P1DT12H, PT140M, -P120D, PT9M8.1S
- ✚ dateTime, date, time, gYearMonth, gYear, gMonthDay, gDay, gMonth
 - representation of points in time, and parts thereof
 - full format -?CCYY-MM-DDThh:mm:ss(Z | [+ -]hh:mm)?
 - e.g. 2002-07-05T10:36:59+02, 2002-07-05, 10:36:59+02:00, 2002-07, 2002, --07-05, ---05, --07--

User-Defined Types

- ✚ constraining built-in types
- ✚ resulting type is a subset of the original type

```
<xs:simpleType name="Name">  
  <xs:restriction base="Base-Type">  
    <-- facets -->  
  </xs:restriction>  
</xs:simpleType>
```

defines a type *Name* as a subset of *Base-Type*

- ✚ Facets describe specific aspects of the type

User-Defined Types (2)

- ✚ Facets depend on the base type
- ✚ For string, ID, anyURI, QName, Lists, ...
 - `<xs:length value="..." />`
 - `<xs:minLength value="..." />`
 - `<xs:maxLength value="..." />`
- ✚ For numeric types (float, double, decimal), duration, dateTime, ...
 - `<xs:minInclusive value="..." />`
 - `<xs:minExclusive value="..." />`
 - `<xs:maxInclusive value="..." />`
 - `<xs:maxExclusive value="..." />`

User-Defined Types (3)

- ✚ For decimal and derived types
 - `<xs:totalDigits value="..." />`
 - `<xs:fractionDigits value="..." />`
- ✚ For all types except boolean: an enumeration of included values
 - `<xs:enumeration value="..." />`
- ✚ For all types: a regular expression matching all included values
 - `<xs:pattern value="..." />`

User-Defined Types (4)

✚ Examples

```
<xs:simpleType name="alterTyp">  
  <xs:restriction base="xs:positiveInteger">  
    <xs:maxInclusive value="150" />  
  </xs:restriction>  
</xs:simpleType>
```

```
<xs:simpleType name="alterTyp">  
  <xs:restriction base="xs:decimal">  
    <xs:minExclusive value="0" />  
    <xs:maxInclusive value="150" />  
  </xs:restriction>  
</xs:simpleType>
```

User-Defined Types (5)

- ✦ User-defined types can be further derived

```
<xs:simpleType name="ageType">
  <xs:restriction base="xs:decimal">
    <xs:minExclusive value="0" />
    <xs:maxInclusive value="150" />
  </xs:restriction>
</xs:simpleType>
<xs:simpleType name="childAgeType">
  <xs:restriction base="ageType">
    <xs:maxExclusive value="14" />
  </xs:restriction>
</xs:simpleType>
```

User-Defined Types (6)

✦ Enumerations

```
<xs:attribute name="farbe">  
  <xs:simpleType>  
    <xs:restriction base="xs:token">  
      <xs:enumeration value="russisch-grün" />  
      <xs:enumeration value="schilf" />  
      <xs:enumeration value="eierschale" />  
      <xs:enumeration value="mauve" />  
    </xs:restriction>  
  </xs:simpleType>  
</xs:attribute>
```

User-defined Types (7)

- ✦ Combination of multiple facets

```
<xs:element name="inventar-code">  
  <xs:simpleType>  
    <xs:restriction base="xs:string">  
      <xs:minLength value="5" />  
      <xs:maxLength value="10" />  
      <xs:pattern value="[a-z]{2}-[0-9]+" />  
    </xs:restriction>  
  </xs:simpleType>  
</xs:element>
```

User-defined Types (8)

✦ Multiple pattern facets

```
<xs:element name="ISBN">  
  <xs:simpleType>  
    <xs:restriction base="xs:string">  
      <xs:pattern value="\d-\d{3}-\d{5}-\d" />  
      <xs:pattern value="\d-\d{5}-\d{3}-\d" />  
      <xs:pattern value="\d-\d{2}-\d{6}-\d" />  
    </xs:restriction>  
  </xs:simpleType>  
</xs:element>
```